	8	7		6
	Performance Parameters	Symbol	Unit	AVM130-HF-20
	Stroke	S	mm	20.0
	Continuous Force @100°C ^{[1][2]}	Fc	N	226.0
	Peak Force ^[2]	F _{pk}	N	678.1
	Force Constant ±10% ^[2]	K _f	N/A	70.6
D	Back EMF Constant ±10% ^[2]	K _e	V/(m/s)	70.6
	Motor Constant @25°C ^[2]	Km	N/Sqrt(W)	30.8
	Resistance @25°C ±10% ^[3]	R ₂₅	Ω	5.27
	Inductance ±20% ^[4]	L	mH	7.83
	Electrical Time Constant	Te	ms	1.49
	Continuous Current @100°C ^[1]	I _c	А	3.2
	Peak Current	I _{pk}	А	9.6
	Continuous Power Dissipation @100°C ^[1]	Pc	W	69.5
	Max. Coil Temperature	t _{max}	°C	100
	Thermal Dissipation Constant ^[1]	K _{th}	W/ºC	0.927
	Max. Voltage	U _{max}	Vdc	120
	Coil Mass	m _{coil}	g	1955.5
С	Core Mass	m _{core}	g	6559.0
	Running Clearance	L _{gap}	mm	0.55

[1] Measurement is taken at ambient temperature 25°C. Value depends on the thermal environment.

[2] The values are at mid stroke.

В


Α

8


[3] Resistance is measured by DC current with 0.5 m lead wire.

[4] Inductance is measured by current frequency of 1 kHz.

The contents of datasheet are subject to change without prior notice.

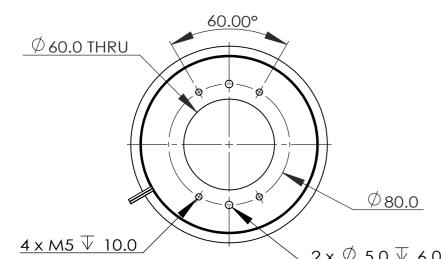

7

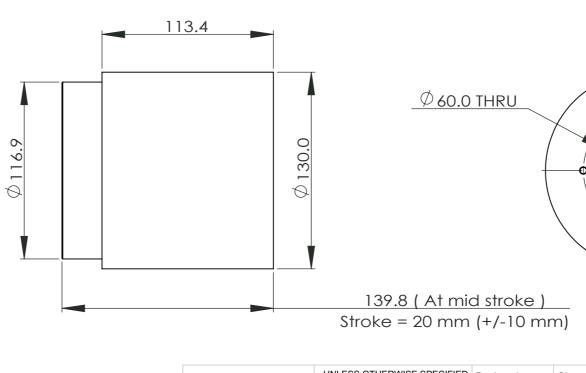

4

-6


-4

	<u>At mid stroke)</u> 0 mm (+/-10 m	
AKRIBIS SYSTEMS UNLESS OTHERWISE SF	PECIFIED, Designed	SL
CONFIDENTIAL: ALL DIMENSIONS IN mm THIS DOCUMENT AND REMOVE ALL SHARP ED	Drawn	SL
THE INFORMATION	Checked	YH
CONTAINED IN IT ARE CONFIDENTIAL, AND GENERAL	Approved	YX
CANNOT BE CÓPIED OR TOLERANCE	Material	NA
DISCLOSED IN WHOLE X ± 0.25mm OR IN PART WITHOUT X.X ± 0.1mm 3rd AI PRO I	ANGLE Surface Treatmer	nt NA
WRITTEN CONSENT OF X.XX ± 0.05mm	Heat Treatment	NA
AKRIBIS SYS PTE LTD X.XXX ± 0.025mm	Quantity	NA

5

6

AVM130-HF-20

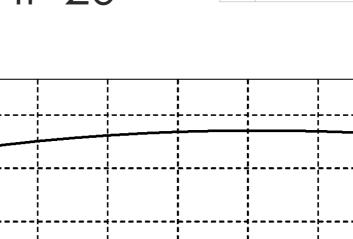

-2

0

Stroke (mm)

3

2

5

75

Force Constant (N/A) 05 67 09

15

-10

-8

4

3

REV 0

		2			1		
DESCRIPTION				ВҮ	DATE	APPD	7
INIT				SL	2021/11/16	YX	-
							-
							-
							-
							D
				1			
				·			
	i	i	i				
	i	i	i	i			
				·			
	-						C
	i	i	i	i			
			.	·	l		
	2	4	6	8	10		
n)							
				,	the construction		
			$\overline{}$		⊅80.0_		
							В
	//			\int			
1	o _[+		_			
	Ĩ	ĺ	ĴĨ				
	$ \land \land$	$\langle \rangle$		/			
	$\langle \rangle$	Ø	ć i				
	\mathbf{i}			-			
	\sim						
			\backslash	_6 x M5 ↓	05		
∋)				0 ~ 1010 V	7.5		
mr	n)						
	.,						
							_
	SL	2021/11/15	~				Α
	SL	2021/11/15		Akribis	1.4.1		
	YH	2021/11/16	- VI	Systems Pte ©2004. All rig	Lta hts_reserved		
	YX	2021/11/16	•				_
4	NA		Model:	AVM130-HF-20			_
itment ent	NA		Title : Dwg No:	AVM130-HF-20 AVM130-HF-20		ving	_
	NA		Sheet:	1 OF1	Rev: 0		-
			-11001.		_		

1