	8	7	7		6
	Performance Parameters		Symbol	Unit	AVM19-5
D	Stroke		S	mm	5.0
	Continuous Force @100°C ^{[1][2]}		Fc	Ν	1.66
	Peak Force ^[2]		F _{pk}	Ν	7.50
	Force Constant ±10% ^[2]		K _f	N/A	1.66
	Back EMF Constant ±10% ^[2]		K _e	V/(m/s)	1.66
	Motor Constant @25°C ^[2]		K _m	N/Sqrt(W)	1.11
	Resistance @25°C ±10% ^[3]		R ₂₅	Ω	2.24
	Inductance ±20% ^[4]		L	mН	0.29
	Electrical Time Constant		Te	ms	0.13
	Continuous Current @100°C ^[1]		I _c	А	1.0
	Peak Current		I _{pk}	А	4.5
С	Continuous Power Dissipation @	0100°C ^[1]	Pc	W	2.9
	Max. Coil Temperature		t _{max}	°C	100
	Thermal Dissipation Constant ^[1]		K _{th}	W/ºC	0.038
	Max. Voltage		U _{max}	Vdc	60
	Coil Mass		m _{coil}	g	9.0
	Core Mass		m _{core}	g	23.8
	Running Clearance		L _{gap}	mm	0.40

[1] Measurement is taken at ambient temperature 25°C. Value depends on the thermal environment.

[2] The values are at mid stroke.


В

Α

[3] Resistance is measured by DC current with 0.5 m lead wire.


[4] Inductance is measured by current frequency of 1 kHz.

The contents of datasheet are subject to change without prior notice.

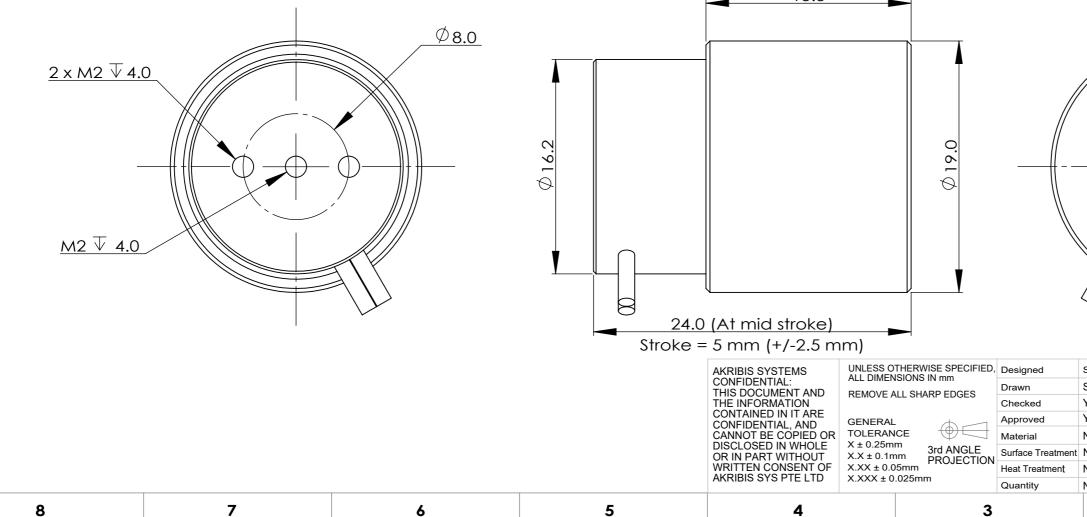

5

3 REV 0

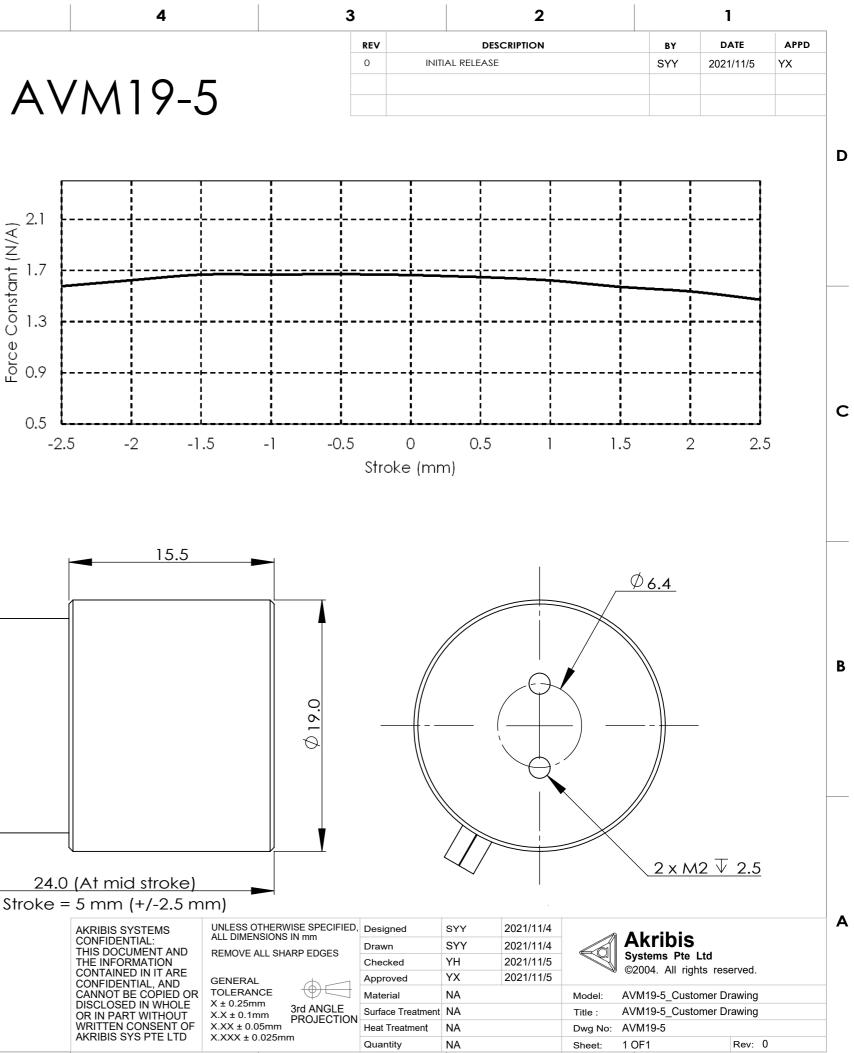

2